


UNI 5587 Brass Nuts

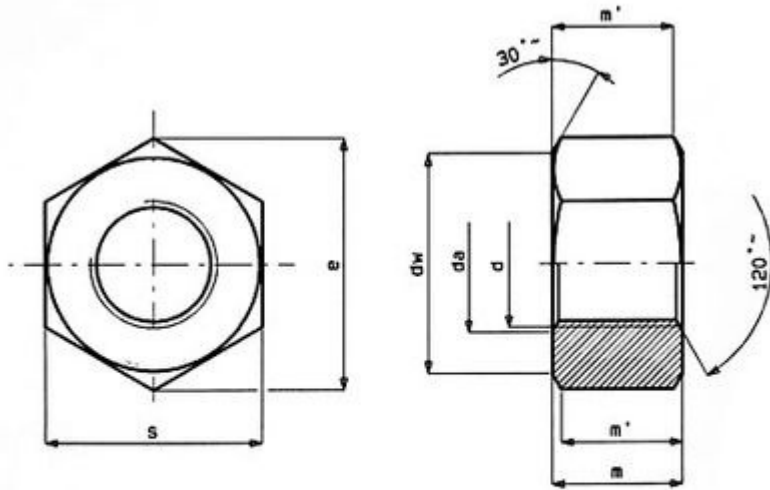

BRASS HEX NUTS UNI 5587

BRASS UNI 5587 HEX NUTS DIN 5587 BRASS THICK NUTS BRASS FULL NUTS

Thread Size Metric Full Nuts Brass		M3 x 0.5	M4 x 0.7	M5 x 0.8	M6 x 1*	M8 x 1.25 *	M10 x 1.5 *	M12 x 1.75 *	M16 x 2 *	M18 x 2.5 *	M20 x 2.5 *	M22 x 2.5 *
m	max.	3	4	5	6	8	10	12	16	18	20	22
	min.	2.75	3.7	4.7	5.7	7.64	9.64	11.57	15.3	17.3	18.7	20.7
m'	min.	2.2	2.96	3.76	4.56	6.11	7.71	9.26	12.24	13.84	14.96	16.56
s	max.	5.5	7	8	10	13	17	19	24	27	30	32
	min.	5.32	6.78	7.78	9.78	12.73	16.73	18.67	23.67	26.16	29.16	31
e	min.	6.01	7.66	8.79	11.05	14.38	18.9	21.1	26.75	29.56	32.95	35.03
da	min.	3	4	5	6	8	10	12	16	18	20	22
	max.	3.45	4.6	5.75	6.75	8.75	10.8	13	17.3	19.5	21.6	23.7
dw	min.	4.5	5.8	6.8	8.8	11.3	15.3	17.2	22.2	25.3	28.2	29.5

ADDEESS:

BRASS NEUTRAL LINKS PRIVATE LIMITED

Plot 12

GIDC Ind estate

Udyognagar

Jamnagar 361005 Gujarat

India

CONTACTS:

PHONE : 91-22-43449300/99

FAX : 91-22-22834046

EMAIL : info@brass-neutral-links.com

[CONTACT US](#) | [BACK TO HOME PAGE](#)

KEYWORDS:

UNI 5587 Nuts, UNI 5587 brass nuts, UNI 5588 nuts, BRASS UNI 5587 HEX NUTS ,DIN 5587 BRASS THICK NUTS ,HEXAGONAL BRASS NUTS ,BRASS FULL NUTS, Brass thick nuts,